arXiv:1210.4323v1 [quant-ph] 16 Oct 2012

# Quantum adiabatic evolution is not necessary adiabatic: Adiabatic evolution realized by dynamical decoupling

Zhen-Yu Wang*
*Department of Physics, The Chinese University of Hong Kong, Shatin, N. T., Hong Kong, China*

We analyze the conditions that lead to an adiabatic evolution with a geometric phase accumulated. To realize the adiabatic evolution, the instantaneous eigenenergies and the degeneracy of the Hamiltonian can change rapidly during the evolution. Using pulse sequences or fast modulation fields, we can suppress the state transitions and realize the adiabatic evolution in a much shorter time.

PACS numbers: 03.65.Vf, 03.67.Pp, 82.56.Jn, 76.60.Lz

*Introduction.* The adiabatic theorem in quantum mechanics concerns the evolution of quantum systems subject to slowly varying Hamiltonians [1]. It says that the transitions between the instantaneous eigenstates of a Hamiltonian is negligible if the change of the Hamiltonian is much slower than the energy gaps between the instantaneous eigenstates. Berry found that in the adiabatic evolution there is a geometric phase determined only by the path in addition to the dynamic phase [2]. Wilczek and Zee generalized the result to non-Abelian geometric phase for degenerate Hamiltonians [3]. The geometric phase is useful in quantum information processing [4–6]. When the change of the Hamiltonian is not much smaller than the energy gaps, the transitions between the eigenstates conceal the geometric phase, that is, these transitions induce an error evolution $U_{\rm Err}$ on the quantum system. Obtaining an exact expression of the error evolution $U_{\rm Err}$ is important. By $U_{\rm Err}$, we can quantify the accuracy of the adiabatic approximation and solve some recent debates (e.g., Refs. [7–12]) on the conditions and validity of adiabatic theorem.

Dynamical decoupling is an efficient method in suppressing the error evolutions including decoherence and unwanted state transitions, through fast operations on the quantum system [13–17]. The performance of dynamical decoupling was demonstrated by experiments (e.g., Refs. [18–22]). It would be of practical interest if we can use the idea of dynamical decoupling to realize adiabatic evolution in a shorter time by suppressing undesired transitions.

In this Letter, we develop a general formalism to quantify the error evolution $U_{\rm Err}$ of the quantum system in the adiabatic evolution. In the adiabatic limit, the error evolution approaches an identity operator ($U_{\rm Err} \to I$). From the expression of $U_{\rm Err}$, we find that to realize $U_{\rm Err} \to I$, the Hamiltonian can change rapidly and the energy levels of the instantaneous eigenstates can have degeneracy or energy crossings during the evolution. Using dynamical decoupling control, we can suppress the state transitions and realize the adiabatic evolution in a much shorter time. Given a path of a parameter space for adiabatic evolution, we can realize the adiabatic evolution by applying a sequence of control pulses which sample the path for adiabatic evolution (see Fig. 1 for an illustration). The time intervals between the pulses can be small, and the adiabatic evolution can be achieved in a very short time.



FIG. 1: (Color online). A sequence of pulses applied to a spin-$\frac{1}{2}$. The red dots indicate the directions of the pulses on the Bloch sphere. The blue semi-circles illustrate the directions of spin rotation. The green dashed line shows the effective path of an adiabatic evolution. This successive rotations induce a geometric phase.

*General formalism.* For simplicity we consider quantum systems of finite dimension, and our formalism can be generalized to the systems with continuous spectra. The quantum system is subjected to a time-dependent Hamiltonian $H(t) = H(\boldsymbol{R})$, where the parameters $\boldsymbol{R} \equiv \boldsymbol{R}(t) \equiv (R_1(t), R_2(t), \cdots)$ change in time as

$$d\boldsymbol{R} \equiv \omega dt. \tag{1}$$

The evolution of arbitrary quantum states (including mixed states) is described by the evolution operator $U(t) = U(\boldsymbol{R})$, which satisfies the Schrodinger equation (with $\hbar = 1$)

$$i\frac{d}{dt}U(t) \equiv i\dot{U}(t) = H(t)U(t), \tag{2}$$

where a dot denotes a time derivative. We will show that at the moment $T$ the evolution operator $U(T) = U_{\rm Dyn}(T)U_{\rm Geo}(T)U_{\rm Err}(T)$ is the product of a dynamic phase factor $U_{\rm Dyn}(T)$, a geometric phase factor $U_{\rm Geo}(T) = U_{\rm Geo}(\boldsymbol{R}_T)$ with $\boldsymbol{R}_T \equiv \boldsymbol{R}(T)$, and an error evolution $U_{\rm Err}(T)$. For an adiabatic evolution, $U_{\rm Err}(T) \to I$.

The instantaneous orthonormal eigenstates $|n_j^t\rangle \equiv |n_j(t)\rangle \equiv |n_j^{\boldsymbol{R}}\rangle$ of the Hamiltonian at time $t$ satisfy

$$H(t)|n_j^t\rangle = E_{n,j}(t)|n_j^t\rangle = E_{n,j}(\boldsymbol{R})|n_j^{\boldsymbol{R}}\rangle. \tag{3}$$

The subscript $j$ may be used to label degenerate states.

Substituting the transformation $U(t) \equiv S(t)U_S(t)$ in Eq. (2) with the unitary operator $S(t)$, we obtain

$$i\dot{U}_S(t) = S^\dagger(t)\left[H(t) - i\dot{S}(t)S^\dagger(t)\right]S(t)U_S(t). \tag{4}$$

Let $S(t) = U_{\rm Dyn}(t)U_{\rm G1}(t)$, and we extract the dynamic phase factor of the system evolution by

$$\begin{aligned} U_{\rm Dyn}(t) &= \sum_{n,j} e^{-i\int_0^t E_{n,j}(s)ds}|n_j^t\rangle\langle n_j^t| \\ &= \sum_{n,j} e^{-i\int_{\boldsymbol{R}_0}^{\boldsymbol{R}} E_{n,j}(\boldsymbol{R})\omega\cdot d\boldsymbol{R}'/|\omega|^2}|n_j^{\boldsymbol{R}}\rangle\langle n_j^{\boldsymbol{R}}|. \end{aligned} \tag{5}$$

And the unitary operator

$$U_{\rm G1}(t) = U_{\rm G1}(\boldsymbol{R}) = \sum_{n,j}|n_j^{\boldsymbol{R}}\rangle\langle n_j^{\boldsymbol{R}_0}| \tag{6}$$

depends only on the geometric property of the eigenstates. We have used the notation $\boldsymbol{R}_0 \equiv \boldsymbol{R}(0)$. The solution of Eq. (4) at time $T$ is $U_S(T) = \mathcal{T}e^{-i\int_0^T H_S(t)dt}$ with $H_S = H_{\rm G2} + H_{\rm Err}$, where $\mathcal{T}$ is the time-ordering operator and

$$H_{\rm G2}(t) = -\sum_{n,p,q}|n_p^0\rangle\langle n_p^t|i|\dot{n}_q^t\rangle\langle n_q^0|e^{i\int_0^t(E_{n,p}-E_{n,q})ds}, \tag{7a}$$

$$H_{\rm Err}(t) = -\sum_{\substack{n\neq m,\\ p,q}}|n_p^0\rangle\langle n_p^t|i|\dot{m}_q^t\rangle\langle m_q^0|e^{i\int_0^t(E_{n,p}-E_{m,q})ds}. \tag{7b}$$

We write $U_S$ in the interaction picture of $H_{\rm G2}$ as $U_S(t) = U_{\rm G2}(t)U_{\rm Err}(t)$, where $U_{\rm G2}(t) = \mathcal{T}e^{-i\int_0^t H_{\rm G2}(s)ds}$ and $U_{\rm Err}(t) = \mathcal{T}e^{-i\int_0^t \tilde{H}_{\rm Err}(s)ds}$ with $\tilde{H}_{\rm Err}(t) = U_{\rm G2}^\dagger(t)H_{\rm Err}(t)U_{\rm G2}(t)$. When the effect of the oscillating factors $e^{i\int_0^t(E_{n,p}-E_{n,q})ds}$ in Eq. (7a) vanishes, $H_{\rm G2}(t)$ becomes geometric. One way to satisfy this condition is to make the energies $E_{n,p}(t) = E_{n,q}(t)$ the same for all state labels $n$, $p$ and $q$, which is just the usual consideration of degenerate Hamiltonians [3]. We note that under a more general condition

$$\int_0^t(E_{n,p} - E_{n,q})ds = 0, \pm 2\pi, \pm 4\pi, \cdots \tag{8}$$

during the system evolution, we still have $e^{i\int_0^t(E_{n,p}-E_{n,q})ds} = 1$. And this is possible when we use pulse sequences and the dynamic phases $\int E_{n,p}(t)dt$ change suddenly. With $e^{i\int_0^t(E_{n,p}-E_{n,q})ds} = 1$, the propagator $U_{\rm G2}(t)$ is a geometric phase factor determined by the parameter $\boldsymbol{R}$ at time $t$,

$$U_{\rm G2}(\boldsymbol{R}) = \mathcal{P}e^{i\int_{\boldsymbol{R}_0}^{\boldsymbol{R}}\sum_{n,p,q}|n_p^{\boldsymbol{R}_0}\rangle\langle n_p^{\boldsymbol{R}'}|i\nabla_{\boldsymbol{R}'}|n_q^{\boldsymbol{R}'}\rangle\langle n_q^{\boldsymbol{R}_0}|\cdot d\boldsymbol{R}'}, \tag{9}$$

where $\mathcal{P}$ is the path-ordering operator and $\nabla_{\boldsymbol{R}'} \equiv (\frac{\partial}{\partial R_1'}, \frac{\partial}{\partial R_2'}, \cdots)$ acting on $|n_q^{\boldsymbol{R}'}\rangle$. Then the whole evolution operator

$$U(T) = U_{\rm Dyn}(T)U_{\rm Geo}(T)U_{\rm Err}(T), \tag{10}$$

is the product of the dynamic phase factor $U_{\rm Dyn}(T)$ in Eq. (5), the geometric phase factor

$$\begin{aligned} U_{\rm Geo}(T) &= U_{\rm Geo}(\boldsymbol{R}_T) \equiv U_{\rm G1}(\boldsymbol{R}_T)U_{\rm G2}(\boldsymbol{R}_T) \\ &= \mathcal{P}e^{i\int_{\boldsymbol{R}_0}^{\boldsymbol{R}_T}\sum_{n,p,q}|n_p^{\boldsymbol{R}}\rangle\langle n_p^{\boldsymbol{R}}|i\nabla_{\boldsymbol{R}}|n_q^{\boldsymbol{R}}\rangle\langle n_q^{\boldsymbol{R}}|\cdot d\boldsymbol{R}}, \end{aligned} \tag{11}$$

and the error evolution

$$U_{\rm Err}(T) = \mathcal{P}\exp\left[i\int_{\boldsymbol{R}_0}^{\boldsymbol{R}_T}\sum_{\substack{n\neq m,\\ p,q}}F_{n,m}^{p,q}(\boldsymbol{R})\boldsymbol{H}_{n,m}^{p,q}(\boldsymbol{R})\cdot d\boldsymbol{R}\right], \tag{12}$$

where

$$\begin{aligned} \boldsymbol{H}_{n,m}^{p,q}(\boldsymbol{R}) &= U_{\rm G2}^\dagger(\boldsymbol{R})|n_p^0\rangle\langle n_p^{\boldsymbol{R}}|i\nabla_{\boldsymbol{R}}|m_q^{\boldsymbol{R}}\rangle\langle m_q^0|U_{\rm G2}(\boldsymbol{R}) \\ &= U_{\rm Geo}^\dagger(\boldsymbol{R})|n_p^{\boldsymbol{R}}\rangle\langle n_p^{\boldsymbol{R}}|i\nabla_{\boldsymbol{R}}|m_q^{\boldsymbol{R}}\rangle\langle m_q^{\boldsymbol{R}}|U_{\rm Geo}(\boldsymbol{R}), \end{aligned} \tag{13}$$

depends on the geometry of the path and the modulation function

$$F_{n,m}^{p,q}(\boldsymbol{R}) = e^{i\int_0^t[E_{n,p}(s)-E_{m,q}(s)]ds} = e^{i\int_{\boldsymbol{R}_0}^{\boldsymbol{R}}(E_{n,p}-E_{m,q})\omega\cdot d\boldsymbol{R}'/|\omega|^2}. \tag{14}$$

The operators $\boldsymbol{H}_{n,m}^{p,q}(\boldsymbol{R})$ describe the effects of the transitions $|m_q^{\boldsymbol{R}}\rangle \leftrightarrow |n_p^{\boldsymbol{R}}\rangle$ between different subspaces. When the frequencies of the Fourier components of the modulation functions $F_{n,m}^{p,q}(\boldsymbol{R})$ are much larger than the typical frequencies of $\boldsymbol{H}_{n,m}^{p,q}(\boldsymbol{R})$, the effects of the transitions $|m_q^{\boldsymbol{R}}\rangle \leftrightarrow |n_p^{\boldsymbol{R}}\rangle$ are suppressed and $U_{\rm Err}(T) \to I$.

One advantage of writing the whole system propagator $U(T)$ in the form of Eq. (10) is that the error in the adiabatic approximation is completely described by the error evolution $U_{\rm Err}(T)$.

In this Letter, we measure the error evolution by the average deviation

$$\Delta U_{\rm Err} \equiv \overline{|\langle\Psi|(U_{\rm Err}(T) - I)|\Psi\rangle|}, \tag{15}$$

where the over bar is the average over all possible initial states $|\Psi\rangle$. $\Delta U_{\rm Err} \to 0$ when $U_{\rm Err}(T) \to I$.

If we are interested in the adiabatic evolution in a subspace, we introduce the projection operator $\Pi$ on the associated eigenspace and the projection operator out of the subspace $\Sigma = I - \Pi$ with $\Pi^2 = \Pi$ and $\Sigma^2 = \Sigma$. Here the associated eigenspace of $\Sigma$ may contain continuous spectra when our formalism is generalized to the systems of infinite dimension. The adiabatic evolution in this subspace is realized when $U_{\rm Err}(T)\Pi \to \Pi$.

*Adiabatic evolution.* Let the eigenvalues of the Hamiltonian $E_{n,p}(t) = E_n(t)$ for all $n$ and $p$, one case of the condition Eq. (8). The usual adiabatic condition requires that the change of the set of parameters $\boldsymbol{R}$ is very slow compared with the energy gaps $E_n - E_m \neq 0$, i.e., $|\frac{d\boldsymbol{R}}{dt}/(E_n - E_m)| = |\omega/(E_n - E_m)|$ very small. The slowly varying Hamiltonian implies that the dynamic phase factors $F_{n,m}^{p,q}(\boldsymbol{R})$ [Eq. (14)] in Eq. (12) are fast-oscillating functions. Note that the operators $\boldsymbol{H}_{n,m}^{p,q}(\boldsymbol{R})$ are geometric and they vary slowly during the evolution. Therefore the fast-oscillating phase factors $F_{n,m}^{p,q}(\boldsymbol{R})$ make the contribution from $\boldsymbol{H}_{n,m}^{p,q}(\boldsymbol{R})$ negligible. In this adiabatic limit

$|\omega/(E_n - E_m)| \to 0$ (i.e., $\omega \to 0$ with finite energy gaps $|E_n - E_m| \neq 0$, or finite $\omega \neq 0$ with $|E_n - E_m| \to \infty$), we have $U_{\rm Err}(T) \to I$. This is the statement of the conventional adiabatic theorem.

*Geometric phase revealed by dynamical decoupling.* The expression of $U(T)$ by Eq. (10) gives us the following observation: if we somehow realize $U_{\rm Err}(T) \to I$ with the geometric phase $U_{\rm Geo}(T)$ the same as that in an adiabatic evolution, we will realize that adiabatic evolution. Note that the key to make $U_{\rm Err}(T) \to I$ is the existence of the modulation function $F^{p,q}_{n,m}(\boldsymbol{R})$ in Eq. (12). The general condition to realize adiabatic evolution is that $F^{p,q}_{n,m}(\boldsymbol{R})$ is a modulation function that makes the effect of $\boldsymbol{H}^{p,q}_{n,m}(\boldsymbol{R})$ in Eq. (12) vanish for $n \neq m$. We will show later that, energy degeneracy of $E_{n,p}$ and $E_{m,q}$ is actually allowed during the system evolution. This is quite different from the conventional belief that we need $E_{n,p} \neq E_{m,q}$ during the adiabatic evolution when $m \neq n$.

In the theory of dynamical decoupling, there are similar modulation functions to make the error evolution vanish [23]. This observation leads to the realization of adiabatic evolution by dynamical decoupling control. To illustrate the idea, we consider a quantum system controlled by a sequence of $N$ unitary pulses,

$$P(\boldsymbol{R}_\mu) = \sum_{n,j} e^{-i\theta_{n,j}(\boldsymbol{R}_\mu)} |n_j^{\boldsymbol{R}_\mu}\rangle\langle n_j^{\boldsymbol{R}_\mu}|, \tag{16}$$

during some time $T$, which can be arbitrary short. The pulses are applied in the order of the parameters $\boldsymbol{R}_\mu = \boldsymbol{R}_1, \boldsymbol{R}_2, \ldots, \boldsymbol{R}_N$. For simplicity, we first assume that between the pulses the system Hamiltonian $H(t) = 0$. To have $U_{\rm G2}(t)$ being completely geometric, we require the condition Eq. (8), i.e.,

$$\sum_{\mu \le \lambda} \left[\theta_{n,p}(\boldsymbol{R}_\mu) - \theta_{n,q}(\boldsymbol{R}_\mu)\right] = 0, \pm 2\pi, \pm 4\pi, \ldots, \tag{17}$$

for all $n$, $p$, $q$, and $\lambda$. One solution is $\theta_{n,p}(\boldsymbol{R}_\mu) = \theta_{n,q}(\boldsymbol{R}_\mu)$. If we want to have $M$ non-degenerate subspaces, we may periodically apply pulses with $\theta_{n,j}(\boldsymbol{R}_\mu) = 2\pi n/M$ [24, 25]. An example of the pulse is the rotation of an angle $2\pi/(2J+1)$ on a spin-$J$ by a magnetic field with a constant direction that defines the eigenstates $|n_j^{\boldsymbol{R}_\mu}\rangle$.

The dynamic phase is $\sum_\mu \theta_{n,j}(\boldsymbol{R}_\mu)$ and the geometric phase factor $U_{\rm Geo}(\boldsymbol{R}_T)$ is given by Eq. (11) with the path sampled by the points $\boldsymbol{R}_\mu$. In the error evolution $U_{\rm Err}(T)$, the modulation function becomes $F^{p,q}_{n,m}(\boldsymbol{R}) = e^{i\sum'_\mu[\theta_{n,p}(\boldsymbol{R}_\mu) - \theta_{m,q}(\boldsymbol{R}_\mu)]}$, where $\sum'_\mu$ is the summation over the phases induced by the pulses that have been applied. The aim of the pulse sequence is to suppress the effect of $\boldsymbol{H}^{p,q}_{n,m}(\boldsymbol{R})$.

Note that for a sequence of $N$ pulses, there are only $N$ fixed points $\boldsymbol{R}_\mu$ in the path. Since between the pulses the Hamiltonian $H(t) = 0$, we can define arbitrary orthonormal states as the basis $|n_p^t\rangle$. Therefore, the geometric phase $U_{\rm Geo}(T)$ is not unique. But notice that when we change the path (which is still fixed by the points $\boldsymbol{R}_\mu$), the error evolution $U_{\rm Err}(T)$ also changes. A good choice of the path is the path that evolves smoothly along the points $\boldsymbol{R}_\mu$ and induces slow change of $\boldsymbol{H}^{p,q}_{n,m}(\boldsymbol{R})$ and negligible error $\Delta U_{\rm Err}$. From another point of view, we use $\boldsymbol{R}_\mu$ to sample a given path, and when the number of sampling points is large enough the error $\Delta U_{\rm Err}$ is negligible. The idea is illustrated by a two-level system in Fig. 1.

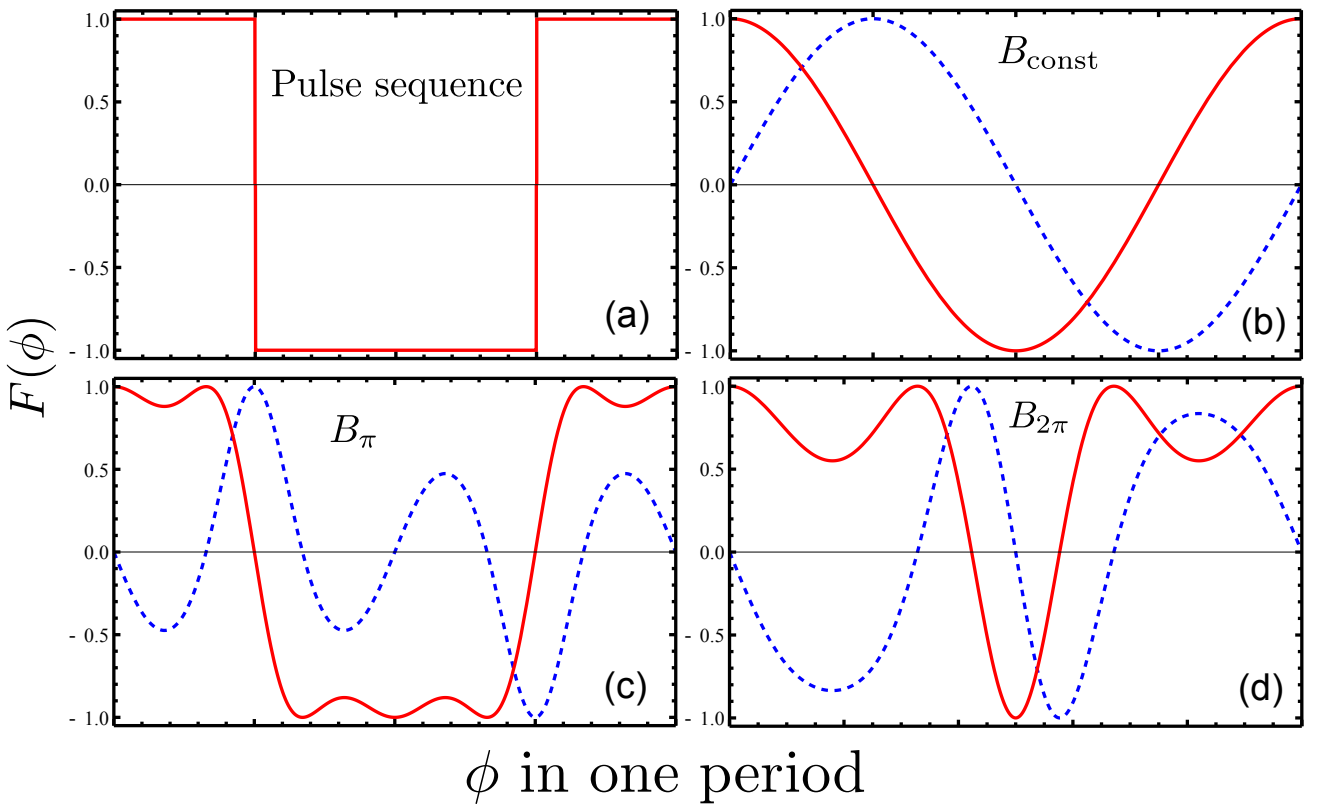

FIG. 2: (Color online). The modulation functions $F(\phi)$ of a spin-$\frac{1}{2}$ in a scaled period. Red solid (blue dashed) lines for the real (imaginary) part of $F(\phi)$. (a) for the modulation function of a pulse sequence, (b) for a constant field $B_{\rm const}$, and (c) and (d) for fast varying fields $B_\pi$ and $B_{2\pi}$, respectively.

There will be extra errors in $U_{\rm Err}(T)$ if there is an uncontrollable Hamiltonian $H_0 \neq 0$, besides the controllable fields. $H_0$ may contain system-environment interaction, which is the case of an open quantum system framework. The system-environment interaction in general will induce decoherence in $U_{\rm Err}(T)$, for example, in conventional adiabatic evolution. However, if the dynamical decoupling control is implemented in a sufficient short time $T$, the effect of $H_0$ can be negligible. Let $U(T)$ be the evolution without $H_0$. The system evolution with $H_0$ is $U_{\rm total}(T) = U(T)\mathcal{T}\exp\left[-i\int_0^T U^\dagger(t) H_0 U(t) dt\right]$. For a bounded $H_0$, $U_{\rm total}(T) \to U(T)$ when $T \to 0$. An interesting topic for future work is the design of dynamical decoupling control to suppress the effect of uncontrollable Hamiltonian more efficiently.

*A spin-$\frac{1}{2}$ driven by a pulse sequence.* An example of the pulses Eq. (16) is a sequence of $\pm\pi$ rotations along the directions $\hat{\boldsymbol{x}}\sin\theta\cos\phi_\mu + \hat{\boldsymbol{y}}\sin\theta\sin\phi_\mu + \hat{\boldsymbol{z}}\cos\theta$ on a spin-$\frac{1}{2}$. The parameter $\boldsymbol{R}_\mu = (\phi_\mu)$. Each of the unitary pulse,

$$P(\phi_\mu) = \sum_{\pm} \exp\left[\pm i(-1)^{g(\mu)}\frac{\pi}{2}\right] |\phi_\mu^\pm\rangle\langle\phi_\mu^\pm|, \tag{18}$$

introduces a $\pm\pi$ phase shift between the instantaneous eigenstates $|\phi_\mu^+\rangle = \cos\frac{\theta}{2}e^{-i\phi_\mu/2}|\uparrow\rangle + \sin\frac{\theta}{2}e^{i\phi_\mu/2}|\downarrow\rangle$ and $|\phi_\mu^-\rangle = -\sin\frac{\theta}{2}e^{-i\phi_\mu/2}|\uparrow\rangle + \cos\frac{\theta}{2}e^{i\phi_\mu/2}|\downarrow\rangle$. Here $g(\mu) = \pm 1$, and the dynamic phase is cancelled when the numbers of $+\pi$ and $-\pi$ pulses are equal. There are other methods to cancel the dynamic phase using pulse sequences [26, 27].

The geometric (Berry) phase from the evolution $\phi_0 = 0$ to $\phi_T$ is $U^{\text{spin}\frac{1}{2}}_{\rm Geo}(\phi_T) = \sum_\pm |\phi_T^\pm\rangle\langle\phi_0^\pm| e^{\pm i\cos\theta\phi_T/2}$. And the error evolution

$$U^{\text{spin}\frac{1}{2}}_{\rm Err}(\phi_T) = \mathcal{P}e^{-i\int_{\phi_0}^{\phi_T}\frac{1}{2}F(\phi)\sin\theta\left(e^{i\cos\theta\phi}|\downarrow\rangle\langle\uparrow| + \text{h.c.}\right)d\phi}, \tag{19}$$

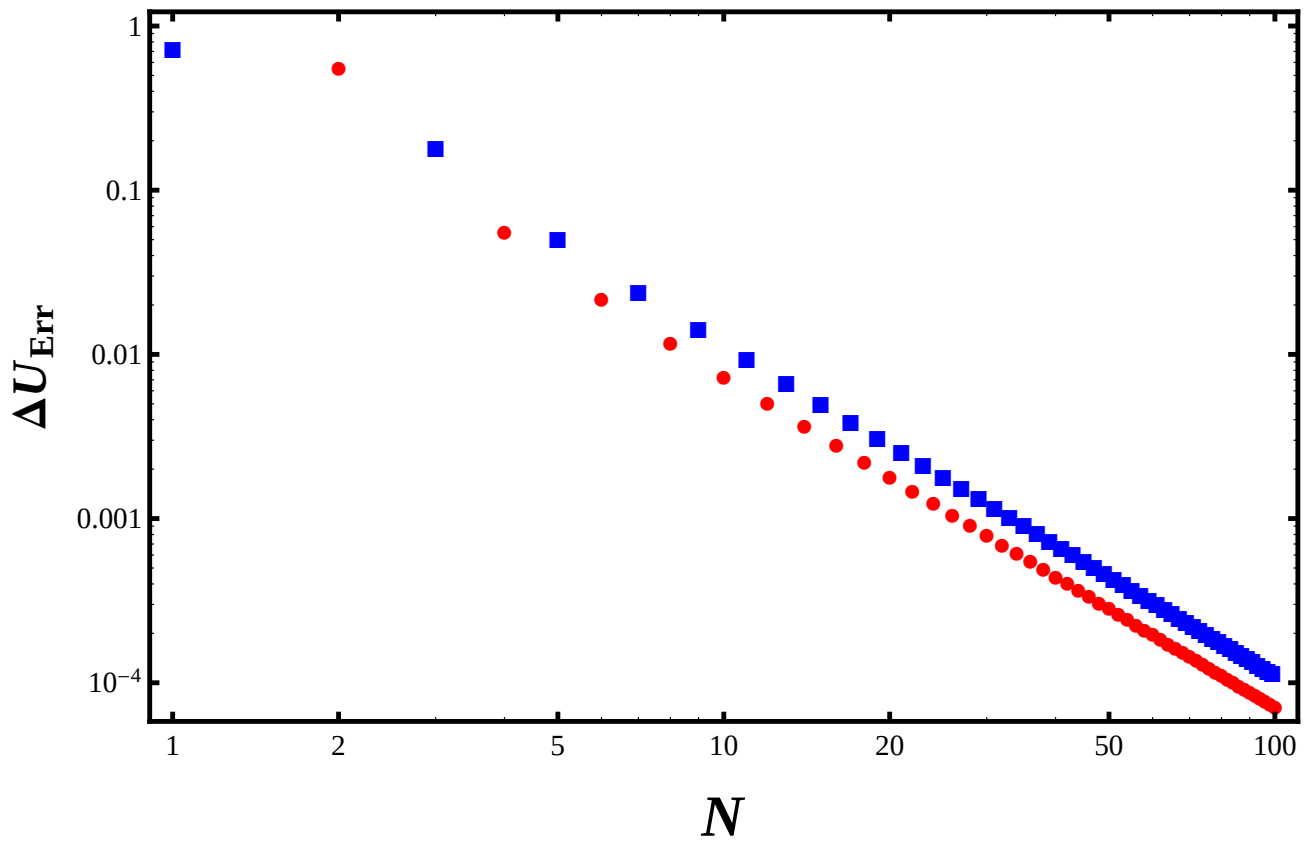

FIG. 3: (Color online). The averaged error $\Delta U_{\rm Err}$ is suppressed by CP sequences with different pulse numbers $N$, with red circles (blue squares) for even (odd) $N$. Here $\phi_0 = 0$, $\phi_T = 2\pi$, and $\theta = \pi/6$.

where the modulation function $F(\phi) = (-1)^{\mu}$ when $\phi \in (\phi_{\mu-1}, \phi_{\mu}]$ [see Fig. 2(a)]. Note that if we apply $2\pi$ rotations on the spin-$\frac{1}{2}$, even though the energy gaps are larger during the control, the modulation function $F(\phi) = 1$ is a constant and the adiabatic evolution is not realized.

In Fig. 3 we show the error $\Delta U_{\rm Err}$ [Eq. (15)] for the case of $\phi_T = 2\pi$ and $\theta = \pi/6$ under the control of Carr-Purcell (CP) pulse sequences [28]

$$\phi_{\mu} = (\phi_T - \phi_0)\left(\frac{2\mu - 1}{2N}\right) + \phi_0, \text{ for } \mu{=}1,\ldots,N. \qquad (20)$$

Here the CP pulses equally sample a circular path with the spacing $2\pi/N$. Figure 3 shows that as the number of pulses increases, the error evolution is smaller, consistent with our theoretical result. The CP sequences with even number of pulses have better performance than the sequences with odd $N$. Note that when $\theta = \pi/2$, the error is completely eliminated (i.e., $\Delta U_{\rm Err} = 0$) by the CP sequences regardless of the pulse numbers $N$.

*A spin-$\frac{1}{2}$ driven by continuously varying fields.* Fast varying fields that are changing continuously can also lead to adiabatic evolution and can have better performance than slowly varying fields. For example, the Hamiltonian of a spin-$\frac{1}{2}$ is $H(t) = \frac{1}{2}\boldsymbol{\sigma}\cdot\boldsymbol{B}(t)$, where $\boldsymbol{B}(t) = B(t)\left[\hat{\boldsymbol{x}}\sin\theta\cos\phi + \hat{\boldsymbol{y}}\sin\theta\sin\phi + \hat{\boldsymbol{z}}\cos\theta\right]$ with the parameter $\phi = \omega t$ changing in time continuously. We consider three cases of the field amplitudes $B(t)$ for comparison: (i) $B_{\pi}(t) = \frac{\Omega}{2}[1 - \gamma\cos(\Omega t)]$, (ii) $B_{2\pi}(t) = 2B_{\pi}(t)$, and (iii) $B_{\rm const}(t) = \sqrt{(2+\gamma^2)/8}\Omega$, which has the same average energy as $B_{\pi}(t)$ [i.e., $\int_0^{\frac{2\pi}{\Omega}} |B_{\rm const}|^2 dt = \int_0^{\frac{2\pi}{\Omega}} |B_{\pi}|^2 dt$]. During the evolution there are degeneracy points when $B_{\pi}(t) = 0$. The field $B_{\pi}$ ($B_{2\pi}$) contributes a $\pi$ ($2\pi$) phase shift in each period of $2\pi/\Omega$. We set $\gamma \approx 2.34213$ so that the average of the modulation function $e^{i\int_0^t B_{\pi}(s)ds}$ vanishes in a half period $\pi/\Omega$.

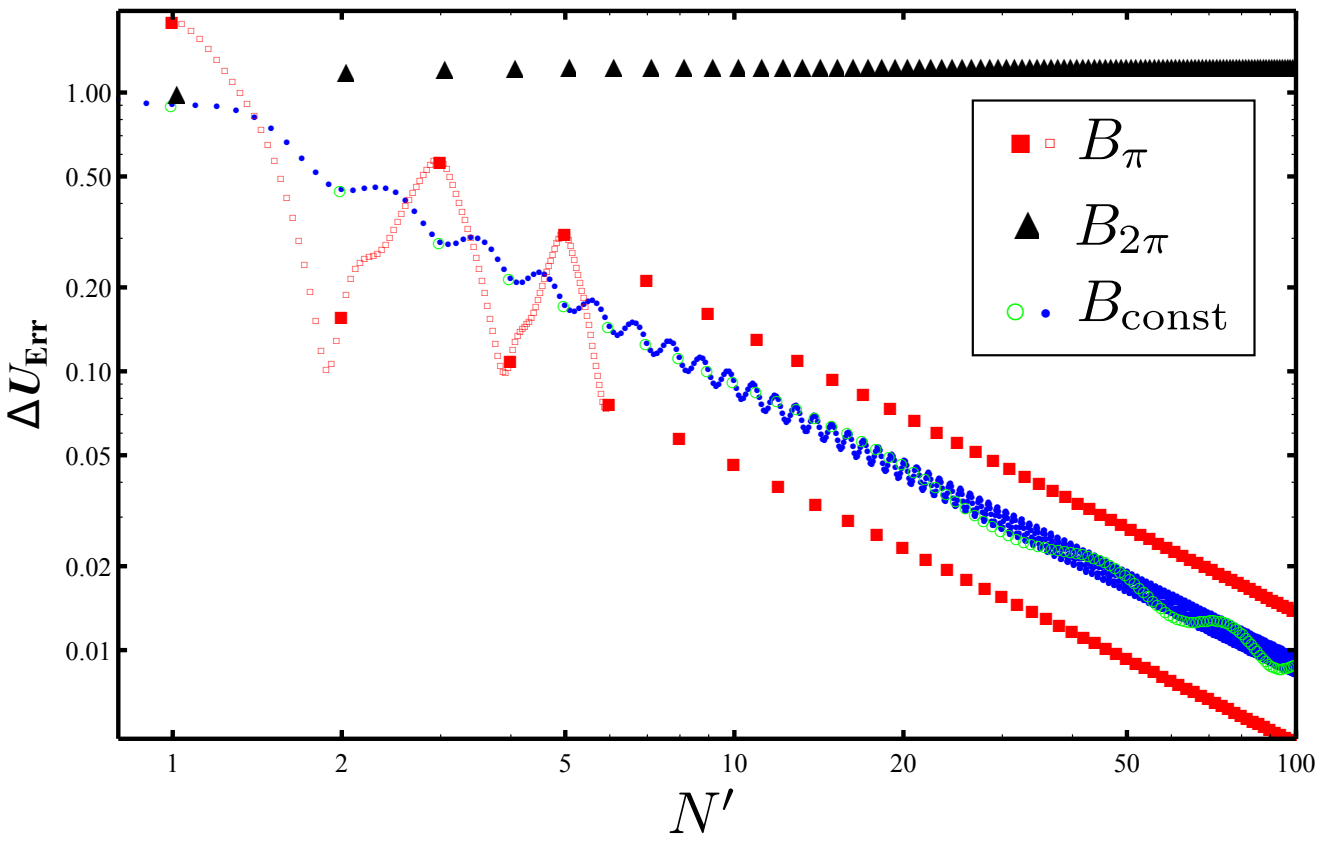

FIG. 4: (Color online). The errors $\Delta U_{\rm Err}$ is suppressed by continuous driving fields, with $\phi_0 = 0$, $\phi_T = 2\pi$, and $\theta = \pi/2$. For $B_{\pi}$, $N' = \Omega/(2\pi)$ is the number of applied $\pi$ pulses. The results are shown at integer numbers of $N'$, with the red squares (black triangles) for the fast field $B_{\pi}$ ($B_{2\pi}$) and the green circles for the field $B_{\rm const}$ of constant amplitude. For other values of $N'$, the results are shown for $B_{\rm const}$ by blue dots and for $B_{\pi}$ by red empty squares from $N' = 1$ to 6.

In Fig. 4, we plot $\Delta U_{\rm Err}$ for $B_{\pi}$, $B_{2\pi}$, and $B_{\rm const}$ as a function of $N' \equiv \Omega/2\pi$ with the total evolution time $T = 1$ and $\omega = 2\pi$. For $B_{\pi}$, the integer values of $N'$ is the number of accumulated $\pi$ phases during the evolution. Increasing $N'$ (e.g., increasing the field amplitudes) is equivalent to increasing the evolution time in adiabatic evolution. As shown in Fig. 4, the fast varying field $B_{\pi}$ realizes the adiabatic evolution $U_{\rm Err}(T) \rightarrow I$ even though the field amplitude changes rapidly and the energy gap can be zero during the evolution. The field $B_{\pi}$ with even number of $\pi$ phase shifts is much more efficient than the slowly varying field $B_{\rm const}$ used in conventional adiabatic evolution, because the modulation function $e^{i\int B_{\pi}dt}$ is more efficient than $e^{i\int B_{\rm const}dt}$ (see the modulation functions in Fig. 2). Even though $B_{2\pi}(t)$ has larger amplitude and energy than $B_{\pi}(t)$, it can not realize adiabatic evolutions since the average of the modulation does not vanish, $\int e^{i\int_0^t B_{2\pi}ds}dt \neq 0$. Thus larger field amplitudes (or energy gaps) do not always lead to better adiabatic evolutions. An interesting topic for future work is to design more efficient control fields that have better performance than the example $B_{\pi}(t)$.

*Conclusions.* We have developed a general formalism to quantify the error transition in adiabatic evolution. We have shown that the instantaneous eigenenergies and the degeneracy of the Hamiltonian can change rapidly during the adiabatic evolution. Instead of changing the parameters $\boldsymbol{R}$ continuously and adiabatically, we can use a pulse to sample a number of points on the path to realize adiabatic evolution. When the parameters $\boldsymbol{R}$ change continuously, fast varying fields can lead to better adiabatic evolution.

I am grateful to Ren-Bao Liu for support and discussions, and thank Fan Yang and Alexander Crosse for discussions. This work was supported by the Hong Kong GRF CUHK402209, the CUHK Focused Investments Scheme, and the National Natural Science Foundation of China Project No. 11028510.

---

[*] Electronic address: zhenyu3cn@gmail.com

[1] A. Messiah, *Quantum Mechanics, Vol. II* (North-Holland Publishing Co., Amsterdam, 1965).
[2] M. Berry, Proc. Roy. Soc. London Ser. A **392**, 45 (1984).
[3] F. Wilczek and A. Zee, Phys. Rev. Lett. **52**, 2111 (1984).
[4] P. Zanardi and M. Rasetti, Phys. Lett. A **264**, 94 (1999).
[5] J. A. Jones, V. Vedral, A. Ekert, and G. Castagnoli, Nature **403**, 869 (2000).
[6] L.-M. Duan, J. Cirac, and P. Zoller, Science **292**, 1695 (2001).
[7] K.-P. Marzlin and B. C. Sanders, Phys. Rev. Lett. **93**, 160408 (2004).
[8] M. Sarandy, L.-A. Wu, and D. Lidar, Quant. Inf. Proc. **3**, 331 (2004).
[9] D. M. Tong, K. Singh, L. C. Kwek, and C. H. Oh, Phys. Rev. Lett. **95**, 110407 (2005).
[10] D. M. Tong, K. Singh, L. C. Kwek, and C. H. Oh, Phys. Rev. Lett. **98**, 150402 (2007).
[11] M. H. S. Amin, Phys. Rev. Lett. **102**, 220401 (2009).
[12] D. M. Tong, Phys. Rev. Lett. **104**, 120401 (2010).
[13] L. Viola, E. Knill, and S. Lloyd, Phys. Rev. Lett. **82**, 2417 (1999).
[14] K. Khodjasteh and D. A. Lidar, Phys. Rev. Lett. **95**, 180501 (2005).
[15] G. S. Uhrig, Phys. Rev. Lett. **98**, 100504 (2007).
[16] Z.-Y. Wang and R.-B. Liu, Phys. Rev. A **83**, 022306 (2011).
[17] W. Yang, Z.-Y. Wang, and R.-B. Liu, Front. Phys. **6**, 2 (2011).
[18] M. J. Biercuk, H. Uys, A. P. VanDevender, N. Shiga, W. M. Itano, and J. J. Bollinger, Nature **458**, 996 (2009).
[19] J. Du, X. Rong, N. Zhao, Y. Wang, J. Yang, and R.-B. Liu, Nature **461**, 1265 (2009).
[20] G. de Lange, Z. H. Wang, D. Ristè, V. V. Dobrovitski, and R. Hanson, Science **330**, 60 (2010).
[21] H. Bluhm, S. Foletti, I. Neder, M. Rudner, D. Mahalu, V. Umansky, and A. Yacoby, Nature Phys. **7**, 109 (2011).
[22] J. Bylander, S. Gustavsson, F. Yan, F. Yoshihara, K. Harrabi, G. Fitch, D. G. Cory, Y. Nakamura, J.-S. Tsai, and W. D. Oliver, Nature Phys. **7**, 565 (2011).
[23] L. Cywiński, R. M. Lutchyn, C. P. Nave, and S. Das Sarma, Phys. Rev. B **77**, 174509 (2008).
[24] Z.-Y. Wang and R.-B. Liu, *General dynamical decoupling for generic coupled systems* (2010), arXiv:1006.1601v1.
[25] P. Wocjan, M. Roetteler, D. Janzing, and T. Beth, Quant. Inf. & Comp. **2**, 133 (2002).
[26] P. J. Leek, J. M. Fink, A. Blais, R. Bianchetti, M. Göppl, J. M. Gambetta, D. I. Schuster, L. Frunzio, R. J. Schoelkopf, and A. Wallraff, Science **318**, 1889 (2007).
[27] S. Berger, M. Pechal, S. Pugnetti, A. A. Abdumalikov, L. Steffen, A. Fedorov, A. Wallraff, and S. Filipp, Phys. Rev. B **85**, 220502 (2012).
[28] H. Y. Carr and E. M. Purcell, Phys. Rev. **94**, 630 (1954).